


## Master-Clip HT 400

Medium & High  
Temperature Hose for tem-  
peratures up to +400 °C

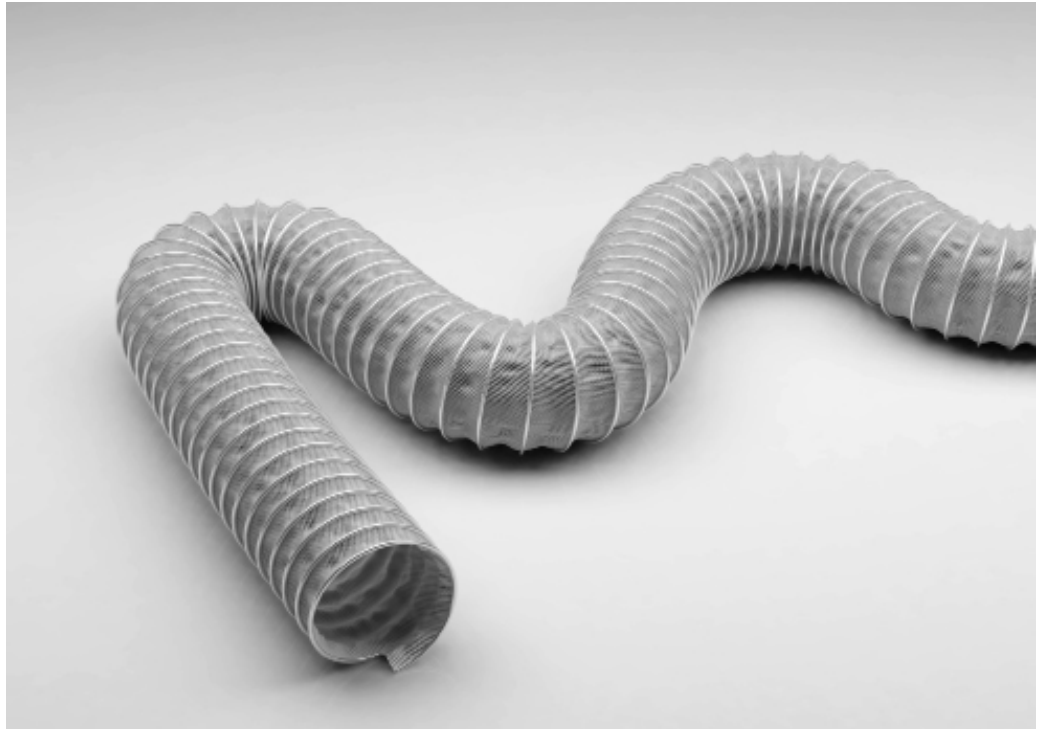

### Material

clip profile spiral: hot-dip galvanised steel band  
wall: special-coated high-temperature fabric, reinforced  
with integrated VA wire

### Applications

- Machine manufacturing
- Low pressure range
- Extractor units
- Hot air
- Smoke extractors
- Oven manufacturing
- Heat protection
- Mining and steel industry
- Primarily suitable as suction hose
- Only partially suitable for exhaust fume extraction

### Properties

- smallest bending radii
- extremely compressable to approx. 1:6
- outer chafing protection spiral
- high tension-proof connection of wall-lining and spiral via special clamp mechanism
- adheres to TRBS 2153 (Zone 1, 21) for non-flammable dusts and gases with low conductivity for dissipation of electrostatic charges with double-ended grounding of Clips and gradient of < 30 mm (see chapter 17.10.5)
- very good temperature resistance
- increased vacuum resistance via integrated reinforcement components
- limited suitability for long-term kink movements
- silicone-free

### Temperature Range

- -20°C to +400°C
- peaks to +450°

DN	vacuum c. mmWC	bend radius c. mm*	weight c. kg/m	article no.			
38	4070	23	0,5	227-038-111			
40	3960	24	0,5	227-040-111			
45	3740	27	0,5	227-045-111			
50	3520	30	0,5	227-050-111			
55	2920	33	0,6	227-055-111			
60	2450	36	0,6	227-060-111			
65	2090	39	0,7	227-065-111			
70	1760	42	0,7	227-070-111			
75	1540	45	0,8	227-075-111			
80	1380	48	0,8	227-080-111			
90	1100	54	0,8	227-090-111			
100	880	60	0,8	227-100-111			
110	730	66	0,9	227-110-111			
120	620	72	0,9	227-120-111			
125	550	75	1	227-125-111			
130	520	78	1	227-130-111			
140	460	84	1	227-140-111			
150	400	90	1,1	227-150-111			
160	350	96	1,1	227-160-111			
170	310	102	1,1	227-170-111			
175	290	105	1,3	227-175-111			
180	270	108	1,3	227-180-111			
200	220	120	1,5	227-200-111			
215	200	151	1,6	227-215-111			
225	180	158	1,8	227-225-111			
250	150	175	2	227-250-111			
275	120	193	2,4	227-275-111			
300	100	210	2,6	227-300-111			
315	90	221	2,6	227-315-111			
325	85	228	2,8	227-325-111			
350	75	245	3,1	227-350-111			
375	65	263	3,6	227-375-111			
400	55	280	3,9	227-400-111			
450	45	360	4,5	227-450-111			
500	35	400	5,1	227-500-111			
550	30	440	5,8	227-550-111			
600	25	480	6,4	227-600-111			
700	20	560	7,5	227-700-111			
800	16	640	8,6	227-800-111			
900	12	720	9,8	227-900-111			

All data refers to a media and ambient temperature of +20 °C

\* refers to the inside of the hose

Order-specific production in above listed sizes and lengths of 3m or 6m, available within 48 hrs on request.  
Available on request in other lengths, sizes, colours, spiral intervals, with stainless steel spirals.  
Subject to technical changes and colour deviations.